



FLAT FOLDED 0.9mm

RESIDENTIAL SECTIONAL GARAGE DOOR



Ashton Flat Folded 0.9mm Sectional Door

DESCRIPTION

The Ashton Flat Folded sectional door uses 0.9mm BMT Zinc-based steel to help ensure the resulting panel is as free from 'oil-canning' as possible from a flat door.

The flat minimalist look of this style of door perfectly complements modern home architecture.

The panel is created from a folded Zinc-based steel sheet with galvanised end-styles and muntins attached.

A sectional garage door is produced by hinging a number of rigid panels together. These panels move vertically in the opening, then horizontally along the ceiling guided by tracks and counterbalanced with springs.

Ashton Garage Doors recommends that all sectional doors be installed with a proven reliable automatic garage door opener. See your local authorised reseller.

SIZE RANGE

The Ashton Flat Folded sectional door is available in sizes from 1960mm to 2800mm in height and from 2400mm to 6000mm in width.

The number of panels required is dependant on the height of the door.

Additional sizes may be available on request.

FEATURES

- ✓ "Tongue & Groove" panel profile.
- ✓ Custom sizes – doors are made to order.
- ✓ Zinc-based steel used in the panel construction has excellent corrosion resistant properties.
- ✓ Heavy duty galvanised hinges.
- ✓ Wheels have ball-bearings for smoother, more durable operation.
- ✓ Springs designed to comply with requirements of Aust./NZ Standard i.e. 20,000 cycles.
- ✓ Reinforcing for wide doors.
- ✓ Bottom weather-seal helps prevent leaves and dirt from entering the garage even on slightly uneven floors.
- ✓ All Ashton Architectural Garage Doors are hand-made to exacting standards to ensure each door is of premium quality.

COLOURS/FINISHES

The Ashton Flat Folded 0.9mm sectional door is available in the popular bare Zinalume[®] finish as pictured this page.

The panels can also be powder-coated in a vast array of colours to suit any colour scheme.


Zinalume[®] Panel Profile showing end-style



FLAT FOLDED 0.9mm RESIDENTIAL SECTIONAL GARAGE DOOR

OPTIONS

If heat and or noise are a concern, the Ashton Flat Folded 0.9mm sectional door has the perfect panels to add insulation to. For more information on what insulation material can be used, please contact the manufacturer or your local authorised reseller.

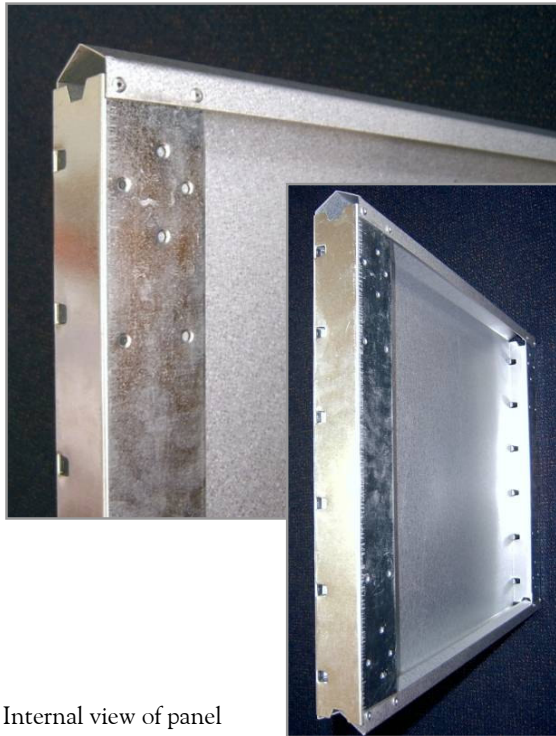

Internal view of panel

INSTALLATION REQUIREMENTS

CARE & MAINTENANCE


A metal Ashton garage door should be cared for like a car. The more you wash and service it, the longer it will last. The corrosion resistance of your Ashton garage door will be greatly enhanced by cleaning its surface monthly with car wash and a soft bristle brush, paying particular attention to the areas that seldom receive the benefits of rain water. This should be done more frequently if in a coastal environment.

As the garage door is the largest moving object in a home, Ashton Garage Doors recommends a yearly service by a trained professional. This will ensure that the door and opener will continue to operate with the correct spring tension and safety settings. All moving parts should be checked for excessive wear and tear, and well lubricated with a silicon-based product. All screws/bolts should be regularly checked for tightness.

A monthly test of the garage door opener's safety settings should be carried out in accordance with the opener's owner's manual recommendations.

Notes / Information

1. Ashton Architectural Garage Doors, in normal residential use are covered by a 1 year warranty for all components and labour conditional on care and servicing as recommended in this specification sheet and by the reseller. Full details of the warranty are available, on request, from your nearest Ashton reseller.
2. The company reserves the right to make changes or improvements to the products or accessories without notice and without incurring any obligation to make similar changes or improvements to goods previously ordered.
3. Details are correct at date of publication. Specifications subject to change without notice. If a specification is critical to the end use, please contact the manufacturer first.
4. Zinalume® is a registered trademark of BHP New Zealand Steel.

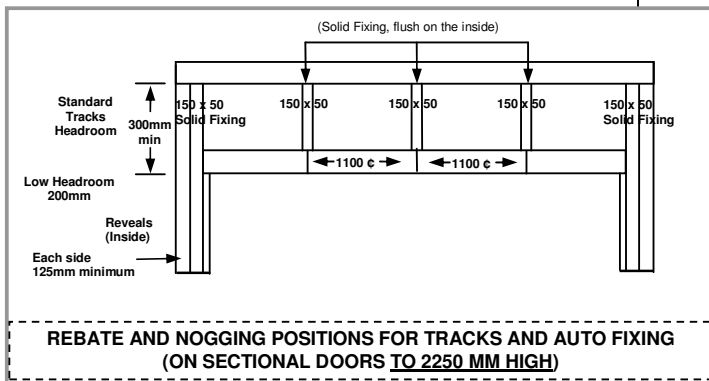

Note: the above specifications can be critical to the proper operation and installation of the door and opener. If unsure, please contact the manufacturer.

